



| REVISIONS | | | |
|-----------|-------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | | 8/21/2023 | |

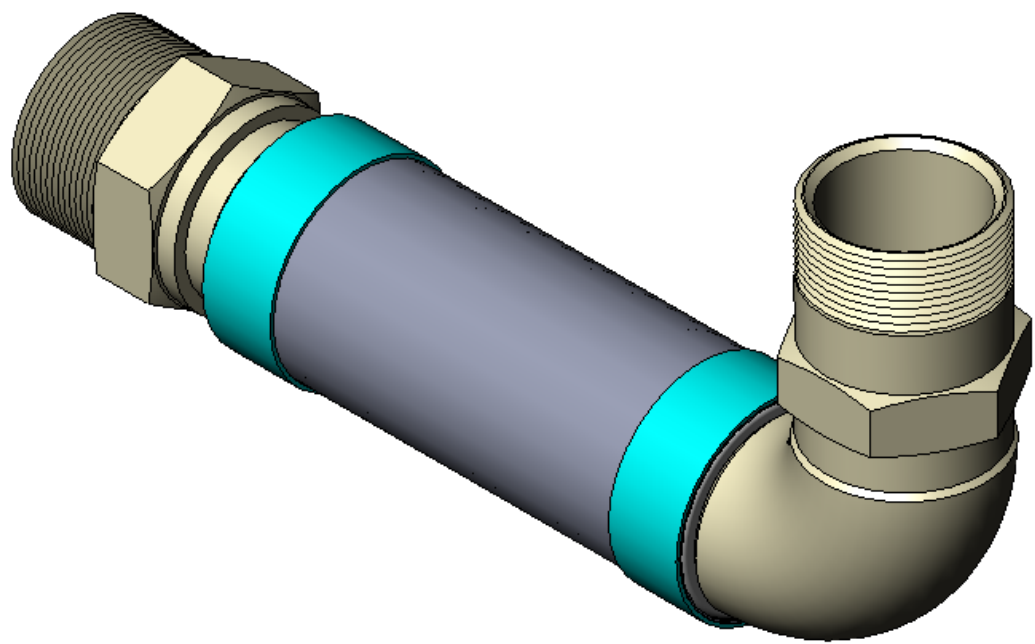

----- COMPONENTS LIST -----

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|----------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless Corrugated Hose | Stainless Steel | 0.41 |
| 2 | 2 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.03 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.09 |
| 4 | 1 | 2" MALE SWIVEL | 2" Male Swivel, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 0.93 |
| 5 | 1 | 2" ELBOW | 2" Short Radius Elbow, Sch. 40 | Stainless Steel | 0.61 |
| 6 | 1 | 2" MALE | 2" Male, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 1.18 |

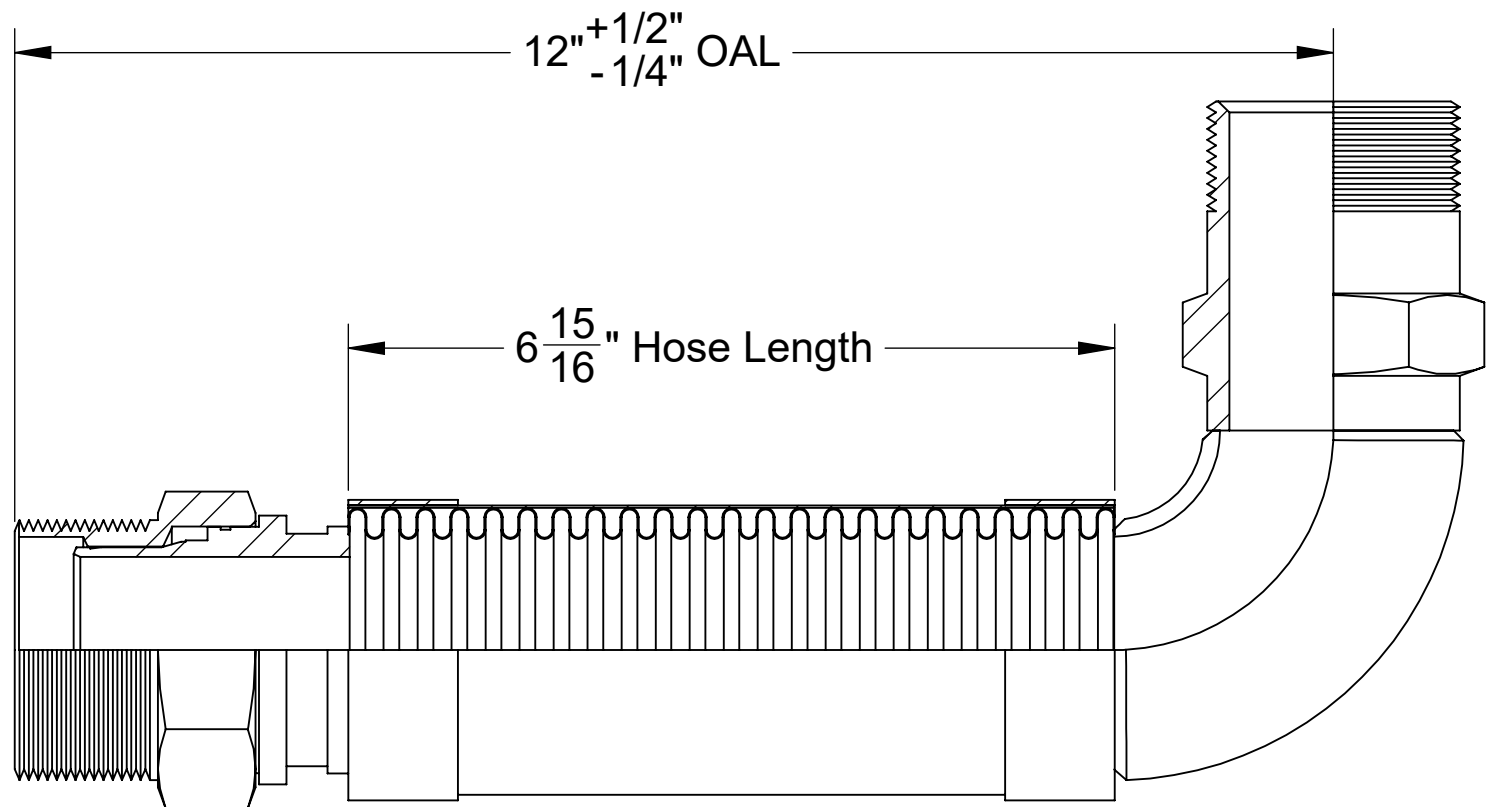

HOSE MASTER

1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
 Cleveland • Houston • Atlanta • Reno

ISO 9001
 Registered Quality System




REFERENCE: Fire-Shield - 2" Male Swivel x 2" 90 Degree Male x 12" OAL

DATE: 9/7/2023

DESCRIPTION:
 2" ID x 12" OAL 300 Series Stainless Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 2" Male Swivel Connector x 2" ID 90 Degree Male Connector

PROJECTION:





DRAWING # **FSSME0200x12**

REV. SHEET 1 OF 1

8 7 6 5 4 3 2 1

| REVISIONS | | | |
|-----------|-------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | | 8/21/2023 | |

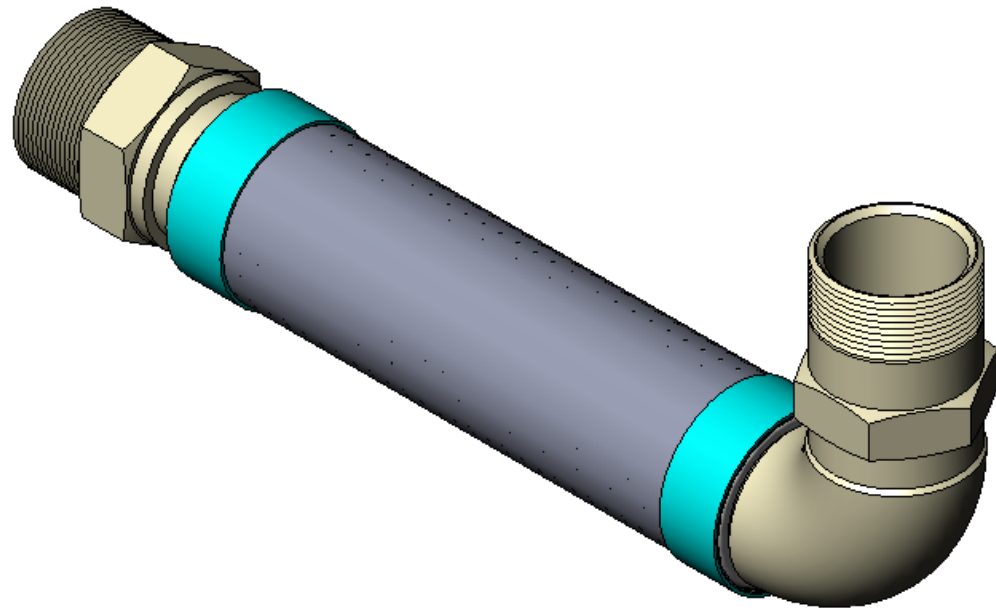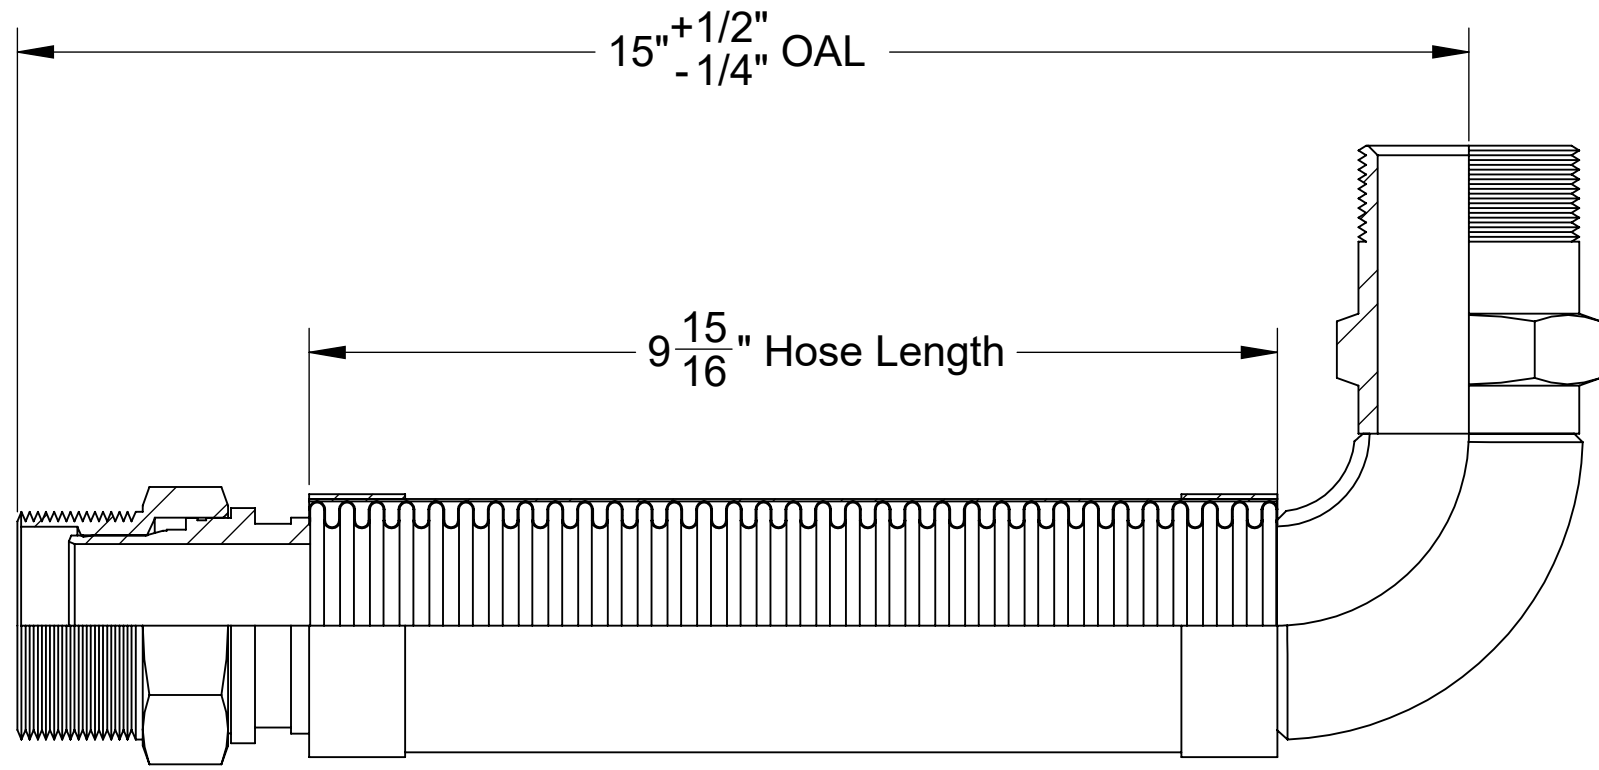

----- COMPONENTS LIST -----

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|----------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless Corrugated Hose | Stainless Steel | 0.57 |
| 2 | 2 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.05 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.09 |
| 4 | 1 | 2" MALE SWIVEL | 2" Male Swivel, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 0.93 |
| 5 | 1 | 2" ELBOW | 2" Short Radius Elbow, Sch. 40 | Stainless Steel | 0.61 |
| 6 | 1 | 2" MALE | 2" Male, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 1.18 |



HOSE MASTER

1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
Cleveland • Houston • Atlanta • Reno

ISO 9001
 Registered Quality System



REFERENCE: Fire-Shield - 2" Male Swivel x 2" 90 Degree Male x 15" OAL

DATE: 9/7/2023

DESCRIPTION:
 2" ID x 15" OAL 300 Series Stainless Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 2" Male Swivel Connector x 2" ID 90 Degree Male Connector

PROJECTION:





DRAWING # **FSSME0200x15**

REV. SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

| REVISIONS | | | |
|-----------|-------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | | 8/21/2023 | |

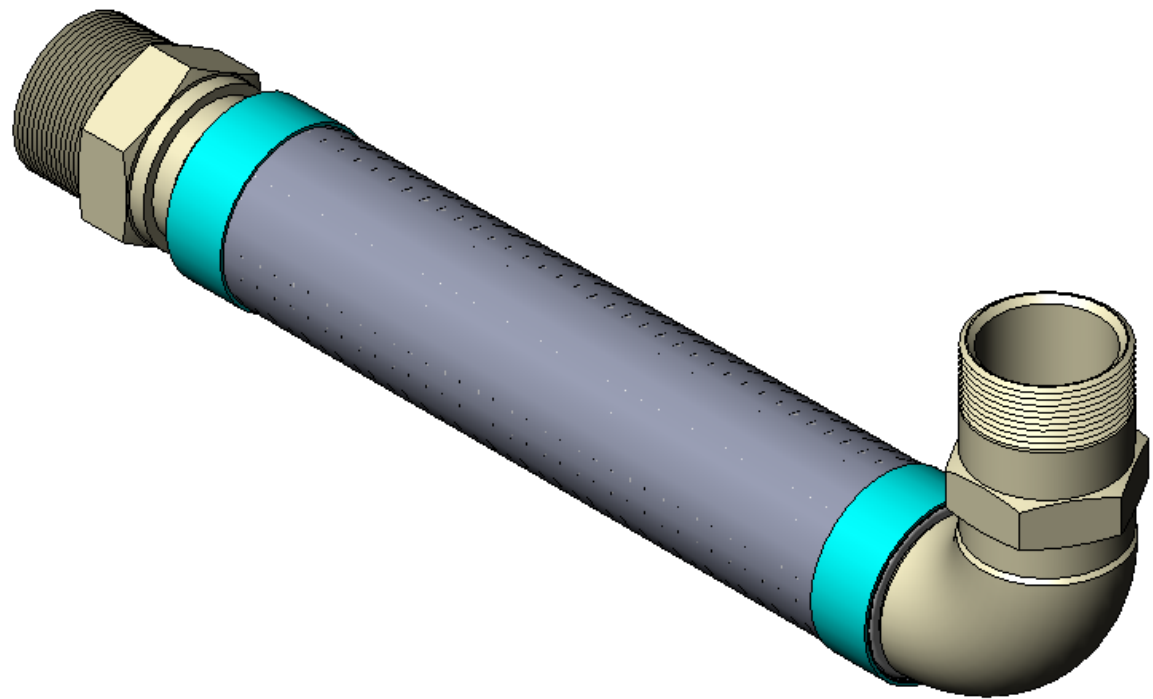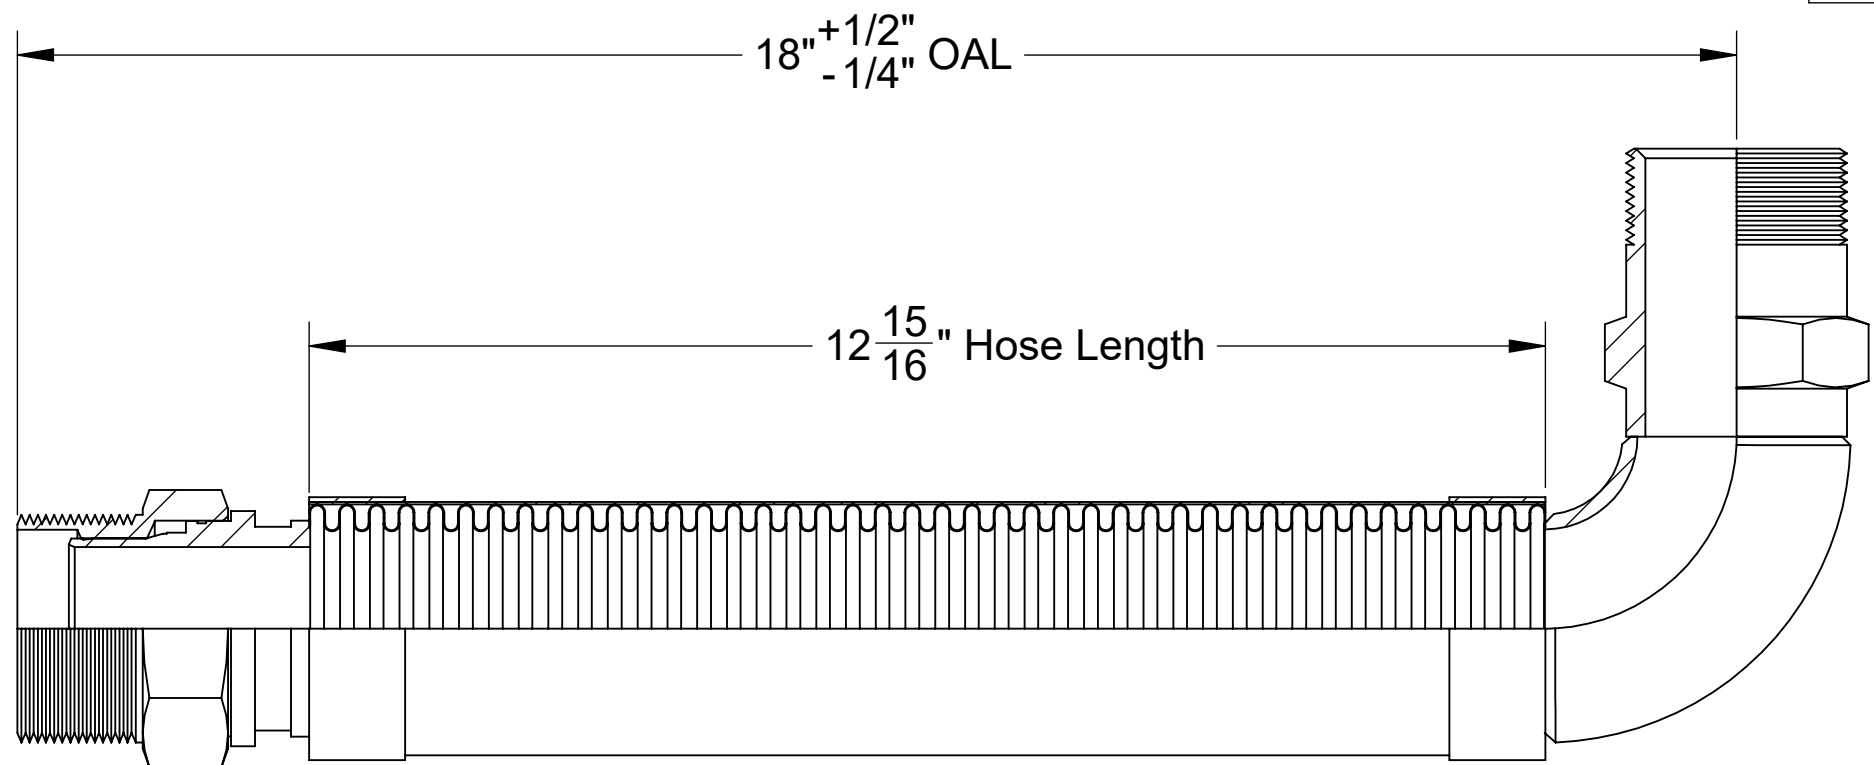

----- COMPONENTS LIST -----

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|----------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless Corrugated Hose | Stainless Steel | 0.74 |
| 2 | 2 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.06 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.09 |
| 4 | 1 | 2" MALE SWIVEL | 2" Male Swivel, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 0.93 |
| 5 | 1 | 2" ELBOW | 2" Short Radius Elbow, Sch. 40 | Stainless Steel | 0.61 |
| 6 | 1 | 2" MALE | 2" Male, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 1.18 |



HOSE MASTER

1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
Cleveland • Houston • Atlanta • Reno

ISO 9001
 Registered Quality System



REFERENCE: Fire-Shield - 2" Male Swivel x 2" 90 Degree Male x 18" OAL

DATE: 9/7/2023

DESCRIPTION:
 2" ID x 18" OAL 300 Series Stainless Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 2" Male Swivel Connector x 2" ID 90 Degree Male Connector

PROJECTION:





DRAWING # **FSSME0200x18**

REV. SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

| REVISIONS | | | |
|-----------|-------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | | 8/21/2023 | |

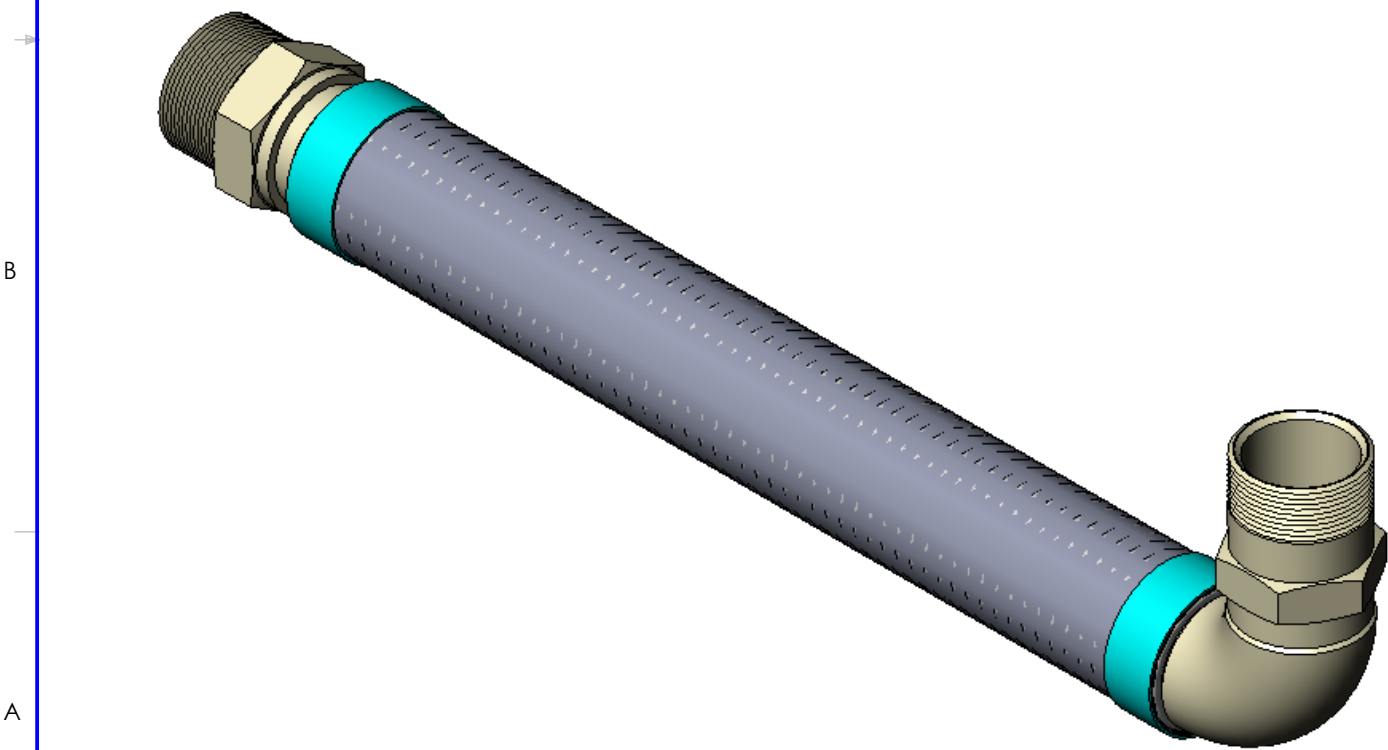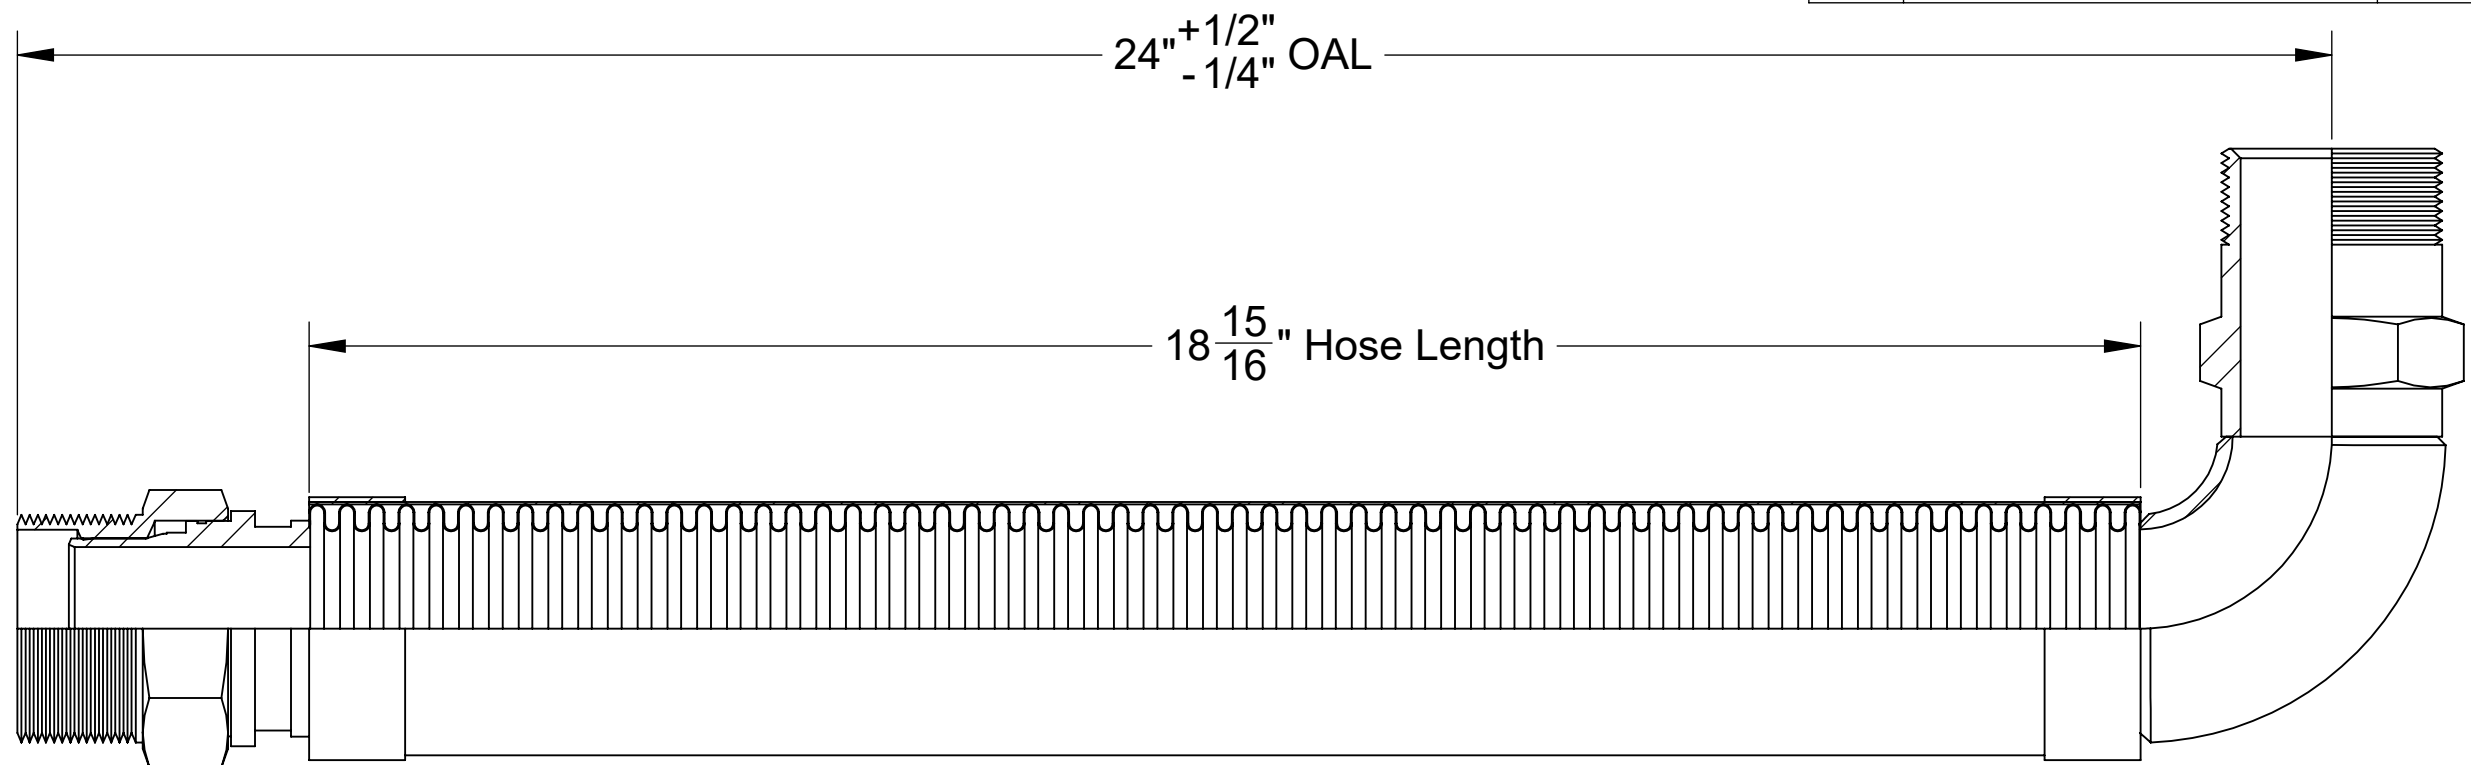

----- COMPONENTS LIST -----

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|----------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless Corrugated Hose | Stainless Steel | 1.08 |
| 2 | 2 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.09 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.09 |
| 4 | 1 | 2" MALE SWIVEL | 2" Male Swivel, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 0.93 |
| 5 | 1 | 2" ELBOW | 2" Short Radius Elbow, Sch. 40 | Stainless Steel | 0.61 |
| 6 | 1 | 2" MALE | 2" Male, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 1.18 |



HOSE MASTER

1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
 Cleveland • Houston • Atlanta • Reno

ISO 9001
Registered Quality System



REFERENCE: Fire-Shield - 2" Male Swivel x 2" 90 Degree Male x 24" OAL

DATE: 9/7/2023

DESCRIPTION:
 2" ID x 24" OAL 300 Series Stainless Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 2" Male Swivel Connector x 2" ID 90 Degree Male Connector

PROJECTION:





DRAWING # **FSSME0200x24**

REV. SHEET 1 OF 1

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

| REVISIONS | | | |
|-----------|-------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | | 8/21/2023 | |

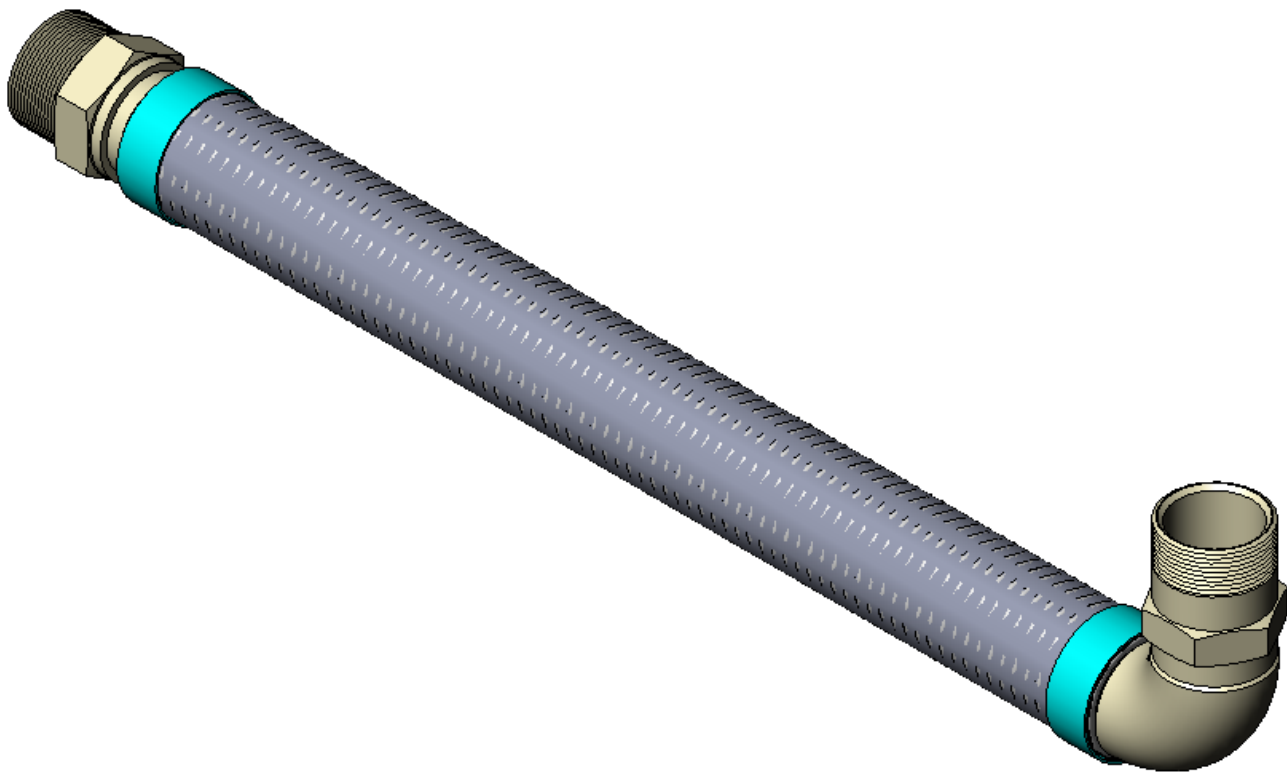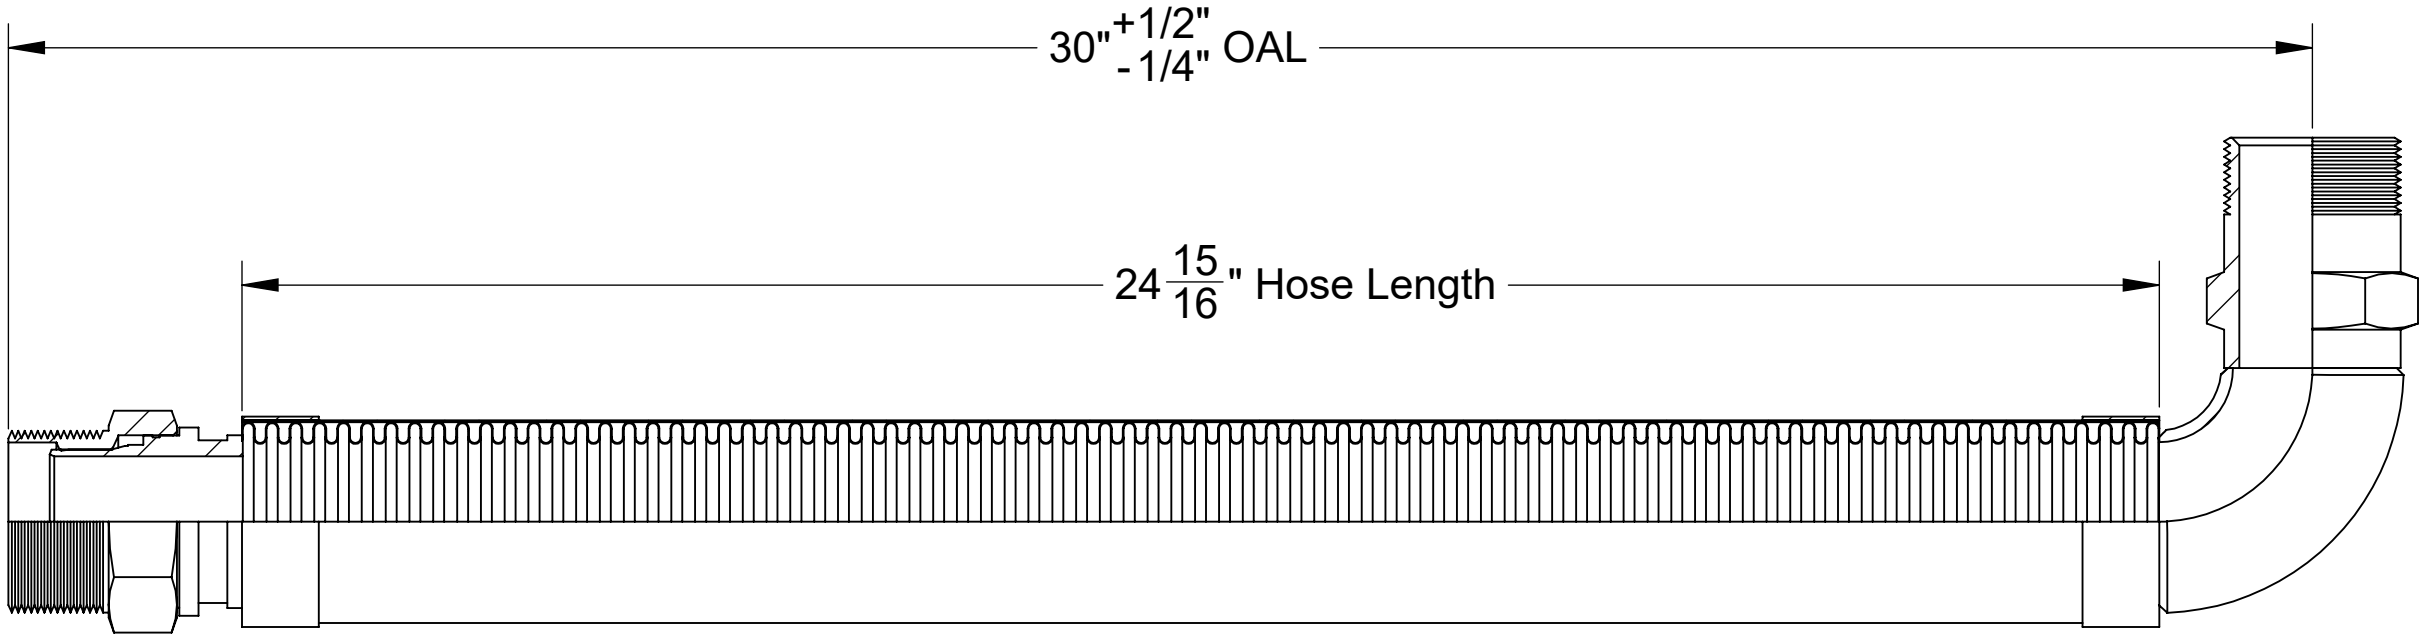

----- COMPONENTS LIST -----

| ITEM # | QTY. | PART NUMBER | DESCRIPTION | MATERIAL | WEIGHT |
|--------|------|----------------|--|-----------------|--------|
| 1 | 1 | HOSE | 300 Series Stainless Corrugated Hose | Stainless Steel | 1.42 |
| 2 | 2 | BRAID | 300 Series Stainless Steel | Stainless Steel | 0.12 |
| 3 | 1 | BRAID COLLAR | 0.05" Thick | Stainless Steel | 0.09 |
| 4 | 1 | 2" MALE SWIVEL | 2" Male Swivel, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 0.93 |
| 5 | 1 | 2" ELBOW | 2" Short Radius Elbow, Sch. 40 | Stainless Steel | 0.61 |
| 6 | 1 | 2" MALE | 2" Male, 2"x11-1/2" Thread, 2.38" Hex | Stainless Steel | 1.18 |



HOSE MASTER

1233 East 222nd Street • Cleveland, Ohio 44117
 (800) 221-2319 • Fax: (216) 481-7557 • www.hosemaster.com
 Cleveland • Houston • Atlanta • Reno

ISO 9001
 Registered Quality System



REFERENCE: Fire-Shield - 2" Male Swivel x 2" 90 Degree Male x 30" OAL

DATE: 9/7/2023

DESCRIPTION:
 2" ID x 30" OAL 300 Series Stainless Corrugated Hose covered by 300 Series Stainless Braid. UL Approved 2" Male Swivel Connector x 2" ID 90 Degree Male Connector

PROJECTION:



DRAWING # **FSSME0200x30**

REV. SHEET 1 OF 1

8 7 6 5 4 3 2 1